

# ems cold room sliding door KSL 80

## Features

Robust, easy to use sliding door. Can be used in all areas requiring easy application.

Range of application up to 0°C  
U value door leaf in W/m<sup>2</sup>K 0.30

### Dimensions:

Clear width (CW): max. 2,500  
Clear height (CH): max. 2,800

## Details of the ems cold room sliding door KSL 80

### Door leaf

Door leaf thickness 80 mm, foamed with PU rigid foam, foaming agent CFC-free and HCFC-free.

### Sealing

On three sides with dual, grease-resistant APTK foam rubber lip insertion seal, held in plastic profiles. Fitted extruded seal in lower section. All sealings are easy to replace.

### Door frames

Ready to install with brick angles to brickwork assembly, or with clamp frame for panel installation. The frames can be easily replaced in case of mechanical damage. Ground level light metal extruded threshold, or without threshold.

### Options

- Lateral frame crossbeam for improved aesthetics.
- Tubular track lead-through

### Covering sheet steel design

Galvanized Quality Class Z275, corrosive protection class III pursuant to DIN 55928. Polyester coating, 25 µm in different colours pursuant to ems colour table. Optional special coating FS3000 @ 25µm, specially suitable for use in food processing, in the colours 9001 (equivalent to RAL 9001), 9002 (equivalent to RAL 9002) and 9010 (equivalent to RAL 9010). Optional coating food wrapping (LMF), 150 µm, colour 9001 (equivalent to RAL 9001), only suitable for use in dry inside areas.

### Covering stainless steel design

Nickel-chromium steel (CNS) 1.4301, non-rusting pursuant to DIN 17440, circular-matted, grounded lengthwise, brushed or pattern-rolled (5WL).

### Mounting suspension


Easy to clean, reliable running and simple handling are special features of the patented hygiene guide rails processed completely from polished special steel LS 3000 (DE 100 11 245.5). Convenient handling is ensured for large dimensions via energy storages. The design which has no corners and edges and no hidden components enables simple, and above all, swift assembly.

### Fitting

Standard design: Stainless-steel tube handle


### Options (on request) i.a.:

- Bolt lock with integrated emergency release
- Lateral releasing handle
- Windows WxH = 400x600mm

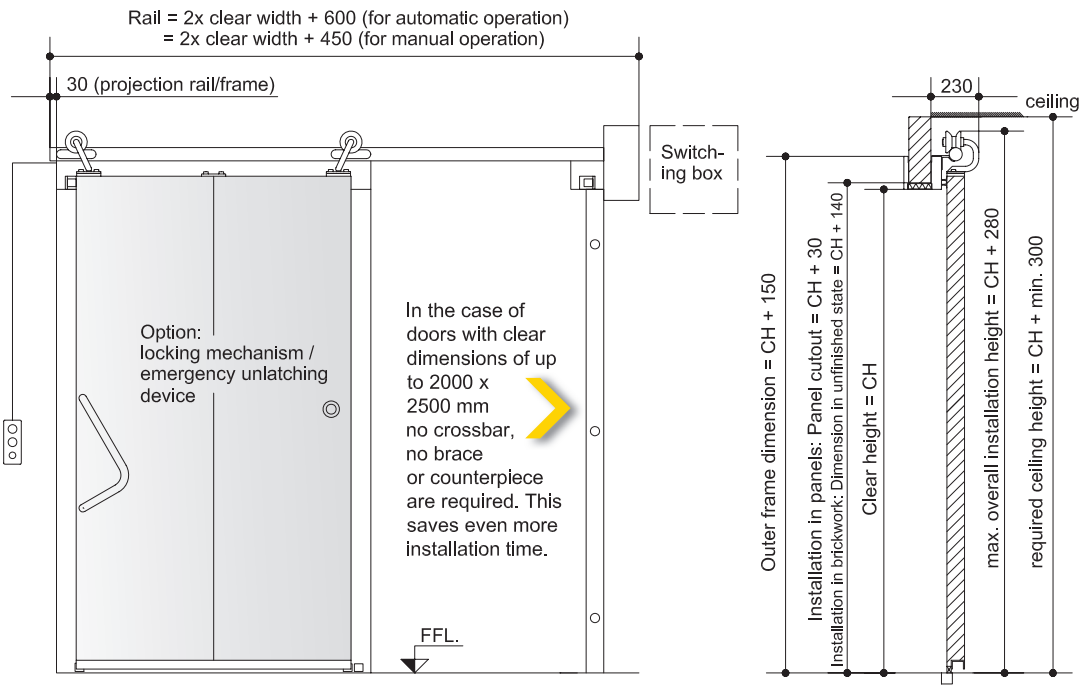

Detailed sections

Panel installation DIN right (DIN left mirror-inverted)

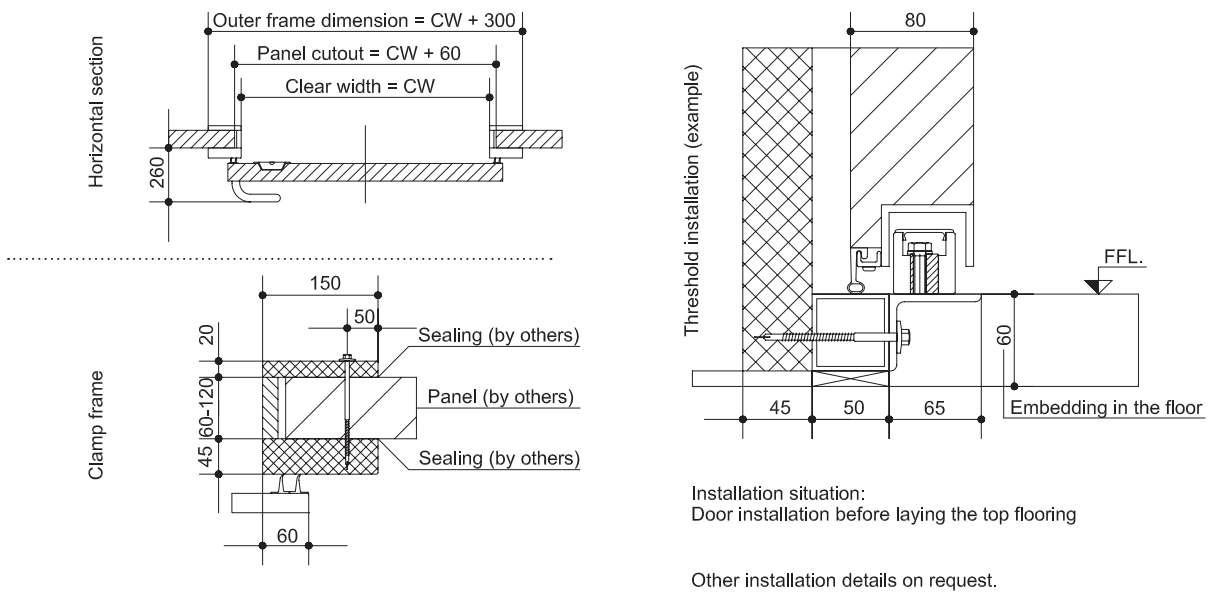

Brickwork installation DIN right (DIN left mirror-inverted)

